

CK-60 Series

Price Computing Interface Scales




Models


CK-60	Standalone
CK-60R	Scale With Register Interface
CK-P60	Scale With Pole Display
CK-P60R	Scale With Register Interface and Pole Display

Specifications

Capacity and Graduation:	60 x 0.01 lb.
Maximum Tare:	60 lb.
NTEP Certificate Number:	Approved 1/6000 Resolution, Legal for Trade CC #03--11
A/D Conversion Rate:	50 Updates per Second
Direct PLU Keys:	4 Direct PLU Keys Which Can Be Programmed With Tares and Unit Prices
Liquid Crystal Displays— Weight:	6 Digits, 999.999 Maximum
Unit Price:	6 Digits, 9999.99 Maximum
Total Price:	6 Digits, 9999.99 Maximum
Platter Size:	11.8"W x 8.9"L (300mmW x 225mmL)
Accreditation:	NTEP Class III, OIML, CE, ISO 9002
Dimensions— W/O Pole Display:	12.6"W x 13.4"L x 4.5" H (320 x 340 x 125mm)
With Pole Display:	12.6"W x 13.4"L x 22.6" H (320 x 340 x 575mm)
AC Adapter— AC Input:	120 Volts AC @ 60 Hz
DC Output:	9 Volts DC, 800mA, Positive Tip
Battery— Without Backlight:	100 Hours
With Backlight:	48 Hours (Continuous Use)
Power Consumption:	Approximately 10 Watts
Fuse Rating:	250 Volts, 1.5 Amp

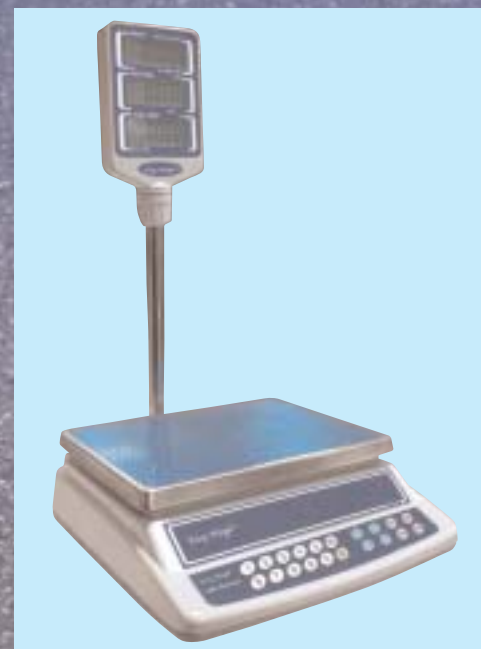

**Model CK-P60
Including a Pole Display**



Standard Rear Display



CRS Peripheral & Parts Division
www.crs-usa.com